FORM PT		DEPARTMENT OF COM	MERCE PATENT AND TRADEMARK OFFICE	ATTODARY IS DOCKETAND OND
(REV. 11-	-2000)			ATTORNEY'S DOCKET NUMBER
			TO THE UNITED STATES	146154.00000
	CONCERNIN	NG A FILIN	ED OFFICE (DO/EO/US) IG UNDER 35 U.S.C. 371	U.S. APPLICATION NO. (If known, see 37 CFR 1.5 0 9 / 857357
PCT/E	RNATIONAL APPLIC EP99/09310	CATION NO.	INTERNATIONAL FILING DATE 30 November 1999	PRIORITY DATE CLAIMED 3 December 1998
TITLE	OF INVENTION	DEVICE	FOR ADJUSTING A GAR	
APPLI	CANT(S) FOR DO/E	O/US HOECHS	ST TRESPAPHAN GMBH, Bergstrasse, Neunkin	chen
Applic	ant herewith submits t	to the United Sta	tes Designated/Elected Office (DO/EO/US)	the following items and other information:
1. 🗸			concerning a filing under 35 U.S.C. 371.	
2.	This is a SECOND of	or SUBSEQUEN	VT submission of items concerning a filing u	nder 35 U.S.C. 371.
3. 🔲	This is an express red items (5), (6), (9) and	quest to begin na d (21) indicated	tional examination procedures (35 U.S.C. 33 below.	71(f)). The submission must include
4. 🗸			ation of 19 months from the priority date (A	rticle 31).
5. 🗸			on as filed (35 U.S.C. 371(c)(2))	
			only if not communicated by the Internation	nal Bureau).
	b. And has been co	ommunicated by	the International Bureau.	
	c. is not requi	red, as the applic	cation was filed in the United States Receiving	ng Office (RO/US).
	An English language	translation of the	e International Application as filed (35 U.S.	C. 371(c)(2)).
	a. is attached			.,,,,
	b. has been pr	reviously submit	ted under 35 U.S.C. 154(d)(4).	
7. 🗹	Amendments to the c	laims of the Inter	rnational Aplication under PCT Article 19 (3	35 U.S.C. 371(c)(3))
	a. are attached	d hereto (require	d only if not communicated by the Internation	onal Bureau).
	b. have been c	communicated by	the International Bureau.	
	c. have not be	en made; howev	er, the time limit for making such amendmen	nts has NOT expired.
#: ###		en made and wil		
	An English language	translation of the	e amendments to the claims under PCT Artic	ele 19 (35 U.S.C. 371 (c)(3)).
9.	An oath or declaration	n of the inventor	(s) (35 U.S.C. 371(c)(4)).	
	An English lanugage a Article 36 (35 U.S.C.	translation of the 371(c)(5)).	e annexes of the International Preliminary Ex	xamination Report under PCT
Item	s 11 to 20 below con	cern document(s) or information included:	
11. 🗸	An Information Dis	closure Statemer	nt under 37 CFR 1.97 and 1.98.	
12.	An assignment docu	ament for record	ing. A separate cover sheet in compliance w	vith 37 CFR 3.28 and 3.31 is included.
13.	A FIRST prelimina	ry amendment.		
14.	A SECOND or SUE	BSEQUENT pre	liminary amendment.	
15. 🔲	A substitute specific	cation.		
16.	A change of power	of attorney and/o	or address letter.	
17.	A computer-readable	e form of the seq	quence listing in accordance with PCT Rule	13ter.2 and 35 U.S.C. 1.821 - 1.825.
18.	A second copy of the	e published inter	national application under 35 U.S.C. 154(d)	(4).
9.	A second copy of th	e English langua	age translation of the international application	n under 35 U.S.C. 154(d)(4).
20. 🔽			s Mail Certificate, Return Postcard, Pre	
4 St	FORM SOM IN DEST	GS; WO 00/323	375; DE 37 31 961; US 4 781 562; DE 38	34 719; PCT FORM 101;
			Int. Search Report; Commercial Register	Evidencing Change of Name
Unec	k for Fees totaling \$8	860.00		

U.S. APPLICATION NO CENTO	/n,76375F557	INTERNATIONAL APPLICATION NO		ATTORNEY'S DOC	KET NUMBER
21. The followi	na fees are submitte	ay.		CALCULATIONS	PTO USE ONLY
BASIC NATIONAL	•				
Neither international	al preliminary exam	nination fee (37 CFR 1.482) 445(a)(2)) paid to USPTO	* #1000 00		
International prelim	inary examination i	epared by the EPO or JPO fee (37 CFR 1.482) not paid to	o		
		rt prepared by the EPO or JPC			
but international sea	arch fee (37 CFR 1.	fee (37 CFR 1.482) not paid to 445(a)(2)) paid to USPTO	\$710.00		
but all claims did no	ot satisfy provisions	fee (37 CFR 1.482) paid to Use of PCT Article 33(1)-(4)	\$090.00		
International prelim	ninary examination the field provisions of Pe	fee (37 CFR 1.482) paid to Ut CT Article 33(1)-(4)	SPTO \$100.00	5	
ENTE	R APPROPRIA	TE BASIC FÈE AMO	UNT =	\$ 860.00	
Surcharge of \$130.0 months from the earl	0 for furnishing the liest claimed priorit	oath or declaration later than y date (37 CFR 1.492(e)).	20 30	\$ 0.00	
CLAIMS	NUMBER FILEI	NUMBER EXTRA	RATE	\$	
Total claims	15 - 20 =	=	x \$18.00	\$ 0.00	
Independent claims	2 -3 =		x \$80.00	\$ 0.00	
MULTIPLE DEPEN			+ \$270.00	\$ 0.00	
Au-licent claim		AL OF ABOVE CALCUS. See 37 CFR 1.27. The fees		\$ 860.00	
are reduced by	1/2.	5. Sec 37 CIR 1.27. The lee.	+	\$ 0.00	
1			SUBTOTAL =	\$860.00	
Processing fee of \$1 months from the ear	30.00 for furnishing liest claimed priorit	g the English translation later by date (37 CFR 1.492(f)).	than 20 30	\$	
+ 1		TOTAL NATI	ONAL FEE =	\$860.00	
Fee for recording the	e enclosed assignme appropriate cover sl	ent (37 CFR 1.21(h)). The as heet (37 CFR 3.28, 3.31). \$40	signment must be 0.00 per property +	\$	
		TOTAL FEES I	ENCLOSED =	\$ 860.00	
				Amount to be refunded:	\$
				charged:	\$
	the amount of \$	860.00 to cover	the above fees is enclo	sed.	
					ha shave fees
b. Please cha A duplicat	rge my Deposit Acc e copy of this sheet	is enclosed.	in the amount of \$	to cover u	ne above ices.
c. The Commoverpayme	nissioner is hereby a ent to Deposit Acco	authorized to charge any addit ount No. <u>50-1682</u> . A dupl	tional fees which may icate copy of this shee	be required, or credit t is enclosed.	any
d. Fees are to	be charged to a cre	edit card. WARNING: Information Informatio	mation on this form ma	ay become public. Co	redit card
шогшанс	in should hot be ill	ciudeu on this lorin, 1104lu	o order dara mioriman		
NOTE: Where at	n appropriate time nust be filed and gr	limit under 37 CFR 1.494 o	r 1.495 has not been it	met, a petition to rev	vive (37 CFR
SEND ALL CORRESI		••		Woodward	
POWELL, G	OLDSTEIN, FF	RAZER & MURPHY LI	LP SIGNAT	URE	
PO Box 9722			David	W. Woodward	
,	ivania, Ave., NV	N	NAME	20	
. •	DC 20090-72		35,02	ZU RATION NUMBER	
vvasilington,	DO 20030-12.	20		June 1, 2001	

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

PRELIMINARY
AMENDMENT

Hon. Commissioner of Patents and Trademarks Washington, D.C. 20231

Sir:

Please amend the application as follows:

IN THE CLAIMS

Claims 3-7, 9 and 12 have been rewritten to depend on claim 1 to avoid multiple dependent claims.

- 3. Device according to claim 1, characterized in that the bore (4) of the thermopin is provided between the tapered end and the groove (5) of the thermopin.
- 4. Device according to claim 1, characterized in that a comb strip (14) is attached to the die lip (10), and the thermopins (1) are inserted between the individual teeth of the comb strip (14) on fixing to the die lip (10).

New U.S. Patent Application Based on PCT/EP99/09310 Attorney Docket No. 146154.00000 Page 2

- 5. Device according to claim 1, characterized in that the comb strip (14) is a separate part which is reversibly fixed to the die lip (10).
- 6. Device according to claim 1, characterized in that the thermopin (1) is surrounded by a coil-type heating/cooling cartridge (19).
- 7. Device according to claim 1, characterized in that the coil-type heating/cooling cartridge warms the thermopin via an electric, spirally open wound heating coil.
- 9. Device according to claim 1, characterized in that the thermopin has, at the upper end remote from the die lip, an external thread via which it is connected to a horizontal retention strip (18), the retention strip having a corresponding bore with internal thread.
- 12. Method for adjusting the gap of a slot die, characterized in that the change in the height of the die gap is carried out using thermopins according to claim 1.

New U.S. Patent Application Based on PCT/EP99/09310 Attorney Docket No. 146154.00000 Page 3

REMARKS

Attached hereto is a marked-up version of the changes made to the claims by the current amendment. The attached page is captioned "<u>VERSION WITH MARKINGS</u> <u>TO SHOW CHANGES MADE</u>".

Entry of the Amendment is respectfully requested.

Respectfully submitted,

NUWOON

David W. Woodward Registration No. 35,020 Attorney for Applicant

POWELL, GOLDSTEIN, FRAZER & MURPHY LLP P.O. Box 97223 Washington, D.C. 20090-7223 (202) 347-0066

Dated: June 1, 2001

DWW/db

VERSION WITH MARKINGS TO SHOW CHANGES MADE

IN THE CLAIMS:

Claim 3-7, 9 and 12 have been amended as follows:

- 3. Device according to [one or more of Claims 1 and/or 2,] <u>claim 1</u>, characterized in that the bore (4) of the thermopin is provided between the tapered end and the groove (5) of the thermopin.
- 4. Device according to [one or more of Claims 1 to 3,] <u>claim 1</u>, characterized in that a comb strip (14) is attached to the die lip (10), and the thermopins (1) are inserted between the individual teeth of the comb strip (14) on fixing to the die lip (10).
- 5. Device according to [one or more of Claims 1 to 4,] <u>claim 1</u>, characterized in that the comb strip (14) is a separate part which is reversibly fixed to the die lip (10).
- 6. Device according to [one or more of Claims 1 to 5,] <u>claim 1</u>, characterized in that the thermopin (1) is surrounded by a coil-type heating/cooling cartridge (19).
- 7. Device according to [one or more of Claims 1 to 6,] <u>claim 1</u>, characterized in that the coil-type heating/cooling cartridge warms the thermopin via an electric, spirally open wound heating coil.
- 9. Device according to [one or more of Claims 1 to 8,] <u>claim 1</u>, characterized in that the thermopin has, at the upper end remote from the die lip, an external thread via which it is connected to a horizontal retention strip (18), the retention strip having a corresponding bore with internal thread.
- 12. Method for adjusting the gap of a slot die, characterized in that the change in the height of the die gap is carried out using thermopins according to [one of Claims 1 to 9] claim 1.

JOIE Resid PST/PTO 0 4 JUN 2001

PCT/EP99/09310

5

10

15

20

35

Device for adjusting a gap

The invention relates to a device for adjusting the gap of a die arrangement using a thermopin (1), in which the thermopin is connected to the die lip (10) without any play.

In the production of films, tapes, sheets and similar two-dimensional, continuously shaped extrudates of thermoplastics, a plastic melt is generally extruded through a slot die to give a surface having a rectangular cross section. It is important here to set a controlled thickness profile of the extrudate by adjusting the die gap. The thickness profile is important for subsequent process steps, such as, for example, stacking of sheets, winding of film webs or, for example, stretching of films, thermoforming of sheets, etc. For stretched films in particular, a uniform thickness profile of the final film over the entire width depends on the thickness profile of the precursor film.

It is known to adjust the height of the die gap or its profile by bending the die lip. The fine adjustment is frequently carried out by means of so-called thermopins. These thermopins expand on heating and exert a mechanical force on the die lip, causing the latter to deform. Conversely, the thermopin contracts on cooling, causing tension on the die lip at the corresponding point and thus an increase in the die gap.

For precise adjustment of the die gap by means of thermopins, it is important that the thermopin is connected to the die lip without any play. If there is excessive play, the heating or cooling of the thermopin in some cases does not result in deformation of the lip, but instead the change in the length of the thermopin is partly lost in the play of the arrangement and has no effect. Thermopins therefore have to act on the die lip as directly as possible and without any play.

Known play-free die arrangements with thermopins are afflicted by the disadvantage that they do not facilitate simple exchange of individual thermopins. DE 38 34 719 describes a device which has a bore in a die

10

WO 00/32375 PCT/EP99/09310

-2-

projection, this die projection being an integral part of the die. This connection mechanism may be damaged in operation and may wear. Deficiencies of this type cannot be eliminated since the die projection is an integral part of the die lip. The known device results in premature unusability of the entire die. Furthermore, die deformation by means of a connection mechanism of this type is not sufficiently precise, since the integral die projection results in a stiffening of the die lip.

The object of the present invention was therefore to provide a device for adjusting the gap of a die using thermopins which ensures easy removability of individual thermopins and a play-free connection between the thermopins and the die lip and facilitates precise deformation of the die lip using thermopins.

This object is achieved in accordance with the invention by a device for adjusting the gap of a die arrangement using a thermopin, in which the thermopin is connected to the die lip (10) without any play and this play-free fixing of the thermopin (1) to the die lip (10) is effected by means of a clamp-type socket (7), where the said clamp-type socket (7) engages on the one hand in a lip nose (11) and on the other hand in a groove (5) of the thermopin (1), where the lip nose (11) is an integral part of the die lip (10) and the clamp-type socket (7) has a bore (8) and the thermopin (1) has a bore (4) and a fixing means is passed through the bores (8) and (4).

The sub-claims define preferred embodiments of the device.

The invention is explained below with reference to the embodiments shown in the drawings. The figures show in detail:

Fig. 1 shows a diagrammatic cross-sectional view of the die arrangement according to the invention transverse to the longitudinal direction of the slot die [lacuna] the entire device consisting of die (10 and 10a), thermopin (1), clamp-type socket (7), coil-type heating/cooling cartridge (19) and terminal box (18).

- Fig. 2 shows a cross-sectional view of the thermopin with coil-type heating-cooling cartridge fixed to the die lip.
- Fig. 3 shows a side view of the thermopin.

- Fig. 4 shows a front view of the thermopin.
- Fig. 5 shows a side cross-sectional view of the clamp-type socket.
- 10 Fig. 6 shows a front view of the clamp-type socket.
 - Fig. 7 shows a view of the comb strip with thermopin.
 - Fig. 8 shows a plan view of the clamp strip with partial longitudinal section.

15

20

25

30

- Fig. 2 shows the cross section of an adjustment system arrangement. A die lip (10) and a lower die lip (10a) form a die gap (12), whose height can be adjusted with the aid of a thermopin (1). An integral lip nose (11) with groove (13) in the direction of the die gap opening is mounted on the die lip (10). The thermopin (1) is fixed to the die lip (10) at the lip nose (11) by means of a removable clamp-type socket (7). The thermopin (1) has at the lower end (2), i.e. the end facing the die lip (10), a shape which enables the thermopin (1) to be fixed without any play to the lip nose (11) of the die lip (10) by means of the clamp-type socket (7). The shape of the lower end of the thermopin (2) is shown separately in Fig. 3 and is characterized by the following three preferred features:
- 1. The lower end of the thermopin (2), which is in contact with the lip nose (11) and exerts pressure on the die lip (10) via the lip nose (11) on expansion of the thermopin (1), tapers off and preferably terminates in a pointed tip (3), which ensures a minimal contact area between the thermopin (1) and the lip nose (11).

25

30

35

- 2. A bore (4) is provided above the tapered end, optionally with internal thread, by means of which a detachable fixing means, such as, for example, a screw or a bolt, can be attached.
- 5 3. A groove (5), preferably with a planar surface (6) running at an angle to the orientation of the thermopin (1), is provided above the bore (4) and achieves a non-positive connection between the clamp-type socket (7) and the thermopin (1).
- The removal clamp-type socket (7) is shown in Figs. 5 and 6 and has a shape with precisely fitting surfaces (9), which ensure a non-positive connection firstly with the inclined groove (5) of the thermopin, in particular with the planar surface (6) of the groove (5), and secondly with the groove (13) of the lip nose (11). The clamp-type socket (7) additionally has a bore (8), through which a fixing means is passed and which lines up with the bore (4) of the thermopin (1).

In order to fix the thermopin (1) to the die lip (10), the thermopin (1) is placed on the lip nose (11) in such a way that the groove (5) of the thermopin (1) is oriented in the direction of the die gap opening, i.e. to the front. The clamp-type socket (7) is inserted into the groove (13) of the lip nose (11) and into the groove (5) of the thermopin (1) and fixed by means of a screw or equivalent fixing means, the fixing means being passed through the bore (8) of the clamp-type socket (7) and through the bore (4) of the thermopin (1) and fixed. The clamp-type socket (7) pulls the thermopin (1) downwards, i.e. in the direction of the lip nose (11), so that the thermopin (1) finally sits firmly on the lip nose (11) through its tapered tip (3) and is connected without any play to the lip nose (11) by means of the clamp-type socket (7).

The tapered shape of the lower end of the thermopin (2) means that the individual thermopins (1) are at no point lined up flush against one another. An interspace, which does not occur in known arrangements, is formed between the individual thermopins (1). For example, the claws in DE 38 34 719 are flush against one another. The interspace of the device according

10

15

20

25

30

WO 00/32375 PCT/EP99/09310

- 5 -

to the invention can result in the thermopins (1) rotating in an undesired manner during adjustment. Therefore, in a preferred embodiment of the device according to the invention, a comb strip (14), as shown in detail in Fig. 7, is provided, which is possibly an integral part of the die lip (10) or is preferably in the form of a separate part and is screwed to the die lip (10), as shown in Fig. 2. The comb strip (14) is aligned in such a way here that the row of teeth (15) faces the front, i.e. in the direction of the die opening. The row of teeth (15) of the comb strip (14) is shaped in such a way that the thermopins (1) are inserted with their lower ends (2) into the interspaces of the row of teeth (15) on attachment by means of the clamptype socket (7) (Fig. 7) and, with the clamp-type sockets (7), sit in a precisely fitting manner between the individual teeth (15) of the comb strip (14). This effectively prevents rotation of the thermopins (1) during adjustment. If necessary, the rotation prevention measure can also be supported by means of a suitable shape of the lower end of the thermopin (2).

In accordance with the prior art, the thermopins sit on the die lip at constant intervals over the entire width of the die lip; correspondingly, these embodiments require use of a comb strip which has a constant interval between the individual teeth. This interval is generally in the range from 20 to 40 mm and is preferably from 25 to 35 mm. During the investigations for the present invention, it was found that it is advantageous to arrange the thermopins at different intervals over the width of a die. The different intervals of the thermopins to one another are generally in the range from 5 to 30 mm. Correspondingly, the comb strip for this embodiment has tooth intervals matched to the spacing and physical size of the thermopins. It has been found that this arrangement with different intervals of the thermopins enables significantly more precise adjustment of the thickness profile over the entire film width, in particular in areas which are otherwise difficult to adjust. This inventive idea can of course advantageously be used for any device in which the die gap is set by means of several adjustment elements distributed over the width of the die.

10

15

20

25

The thermopin (1) is surrounded by a coil-type heating/cooling cartridge (19) in such a way that the thermopin (1) can be heated or cooled. The upper end of the thermopin (16), i.e. the end remote from the die lip (10), has an external thread (17). By means of this external thread (17), the thermopin (1) is connected to a horizontal retention strip (20) of the die lip (10). For manual adjustment of the thermopin, a bore with internal thread, which is in turn designed with a threaded pin as a differential screw connection, is incorporated into the retention strip (20).

This differential screw connection enables pre-adjustment of the die gap (12) by moving the thermopin (1) upwards or downwards in overall terms by screwing the differential screw connection. The fine adjustment of the die gap (12) is carried out by warming or cooling the thermopin (1). On warming, the thermopin (1) expands and exerts a pressure on the lip nose (11) and thus reduces the gap (12), i.e. on warming of the thermopin (1) the gap (12) becomes narrower at this point. Conversely, the thermopin (1) contracts on cooling and increases the die gap (12) at this point. In order to enable punctiform introduction of force into the lip nose (11) even under the action of tension, the clamp-type socket (7) is preferably designed with a chamfered claw (21).

If desired, instead of a thermopin which changes its longitudinal expansion as a function of temperature, it is also possible to employ an adjustment pin which works piezomechanically or magnetostrictively or is operated by electrochemical volume changes. Also conceivable are adjustment pins which are only operated mechanically and which may likewise be advantageously modified in accordance with the present invention. The pin design and fixing in accordance with the invention advantageously act in an equivalent manner.

30

35

The shaping of the thermopin (1) in accordance with the invention with a tapered, preferably pointed end (3) and the preferably chamfered claw (21) results in very precise adjustment of the die gap (12). Since the thermopin (1) only presses onto the lip nose (11) with its pointed tip (3) during warming and pulls in a punctiform manner at the lip nose (11) with the

chamfered claw (21) of the clamp-type socket (7) during cooling, the effect of the adjustment of this die pin zone on the adjacent die pin zones on the left and right is greatly reduced. The die deforms in a spatially more narrowly restricted region, i.e. essentially only where the thermopin (1) acts, i.e. exerts a pressure or tension. The design according to the invention of the lower end of the thermopin (2) and of the clamp-type socket (7) is an improvement upon the prior art by facilitating a more direct and precise die gap (12) adjustment using the thermopins (1) which is improved compared with the prior art.

10

5

In order to promote this positive effect even more, the lip nose (11) may be slotted. These slots promote a narrow-band elastic line of the die lip when the thermopin (1) acts on the die lip (10). It is particularly favorable here for the slot intervals to correspond to the intervals of the thermopins (1).

15

20

25

30

35

The warming of the thermopin (1) by the coil-type heating/cooling cartridge (19) is preferably carried out by means of an electric, spirally open wound heating coil which is passed around the thermopin (1) and connected to electric supply lines, these supply lines themselves being connected to a terminal box (18). In accordance with the supply of current, the heating coil and thus the thermopin (1) are heated. The arrangement comprising thermopin (1) and heating coil is surrounded by a closed jacket and in its entirety forms a tubular heating element. The cooling of the thermopin (1) is carried out by inflow of a cooling medium, preferably air, into the free space between the heating coil and the jacket of the tubular heating element, which in turn runs, as an open spiral, parallel to the spiral of the heating coil. This arrangement in its entirety forms the coil-type heating/cooling cartridge (19). This preferred design contributes to rapid and efficient thermopin adjustment and thus to an immediate adjustment of the die gap (12).

Conventional heating/cooling devices for thermopins are designed with spirally closed wound heating coils, which heat the thermopin over the entire surface from the inside or from the outside. In this arrangement, the cooling is then carried out as indirect cooling via full-area cooling of the

-8-

heating coil positioned externally. Alternatively, the cooling is carried out as direct, full-area cooling of the outside in the case of a heating coil located on the inside or direct, full-area cooling of the inside in the case of a heating coil located on the outside. The thermopin here must be designed as a hollow pin, which causes considerable mechanical weakening of the thermopin and reduces the life and load-bearing capacity of the thermopin. The coil-type heating/cooling cartridge (19) design according to the invention has the following essential advantages over the conventional thermopins:

10

15

20

25

30

- Direct heat transfer from the coil-type heating/cooling cartridge (19) to the thermopin (1) is possible.
- There is no weakening of the thermopin (1) by the hole bore.
 This allows a greater adjustment range.
- Individual control of the heating and cooling is possible for each individual thermopin (1).

Both the supply lines to the heating coil and the inlet and outlet air line are preferably connected to the coil-type heating/cooling cartridge (19) via plug connections. In order to replace a thermopin (1), all connections can be detached quickly and easily. The plug connections to the heating coil and cooling lines are detached, the clamp-type socket (7) at the lower end of the thermopin (2) is detached, and the fixing to the retention strip (2) is detached. This enables the entire thermopin adjustment unit with the thermopin (1) and the coil-type heating/cooling cartridge (19) to be removed easily from the die arrangement. Time-saving replacement of individual worn parts is thus readily possible. The device according to the invention is thus extremely maintenance-friendly and enables the replacement of individual elements with extremely short production stoppages.

Patent Claims

- 1. Device for adjusting the gap of a die arrangement using a thermopin, in which the thermopin is connected to the die lip (10) without any play and this play-free fixing of the thermopin (1) to the die lip (10) is effected by means of a clamp-type socket (7), where said clamp-type socket (7) engages on the one hand in a lip nose (11) and on the other hand in a groove (5) of the thermopin (1), where the lip nose (11) is an integral part of the die lip (10) and the clamp-type socket (7) has a bore (8) and the thermopin (1) has a bore (4) and a fixing means is passed through the bores (8) and (4).
- Device according to Claim 1, characterized in that the lower end of the thermopin (2), which is in contact with the lip nose (11), tapers off,
 preferably terminating in a pointed tip (3).
 - 3. Device according to one or more of Claims 1 and/or 2, characterized in that the bore (4) of the thermopin is provided between the tapered end and the groove (5) of the thermopin.

20

5

10

4. Device according to one or more of Claims 1 to 3, characterized in that a comb strip (14) is attached to the die lip (10), and the thermopins (1) are inserted between the individual teeth of the comb strip (14) on fixing to the die lip (10).

25

- 5. Device according to one or more of Claims 1 to 4, characterized in that the comb strip (14) is a separate part which is reversibly fixed to the die lip (10).
- 30 6. Device according to one or more of Claims 1 to 5, characterized in that the thermopin (1) is surrounded by a coil-type heating/cooling cartridge (19).


30


- 10 -


- 7. Device according to one or more of Claims 1 to 6, characterized in that the coil-type heating/cooling cartridge warms the thermopin via an electric, spirally open wound heating coil.
- 5 8. Device according to Claim 7, characterized in that the cooling of the thermopin (1) is effected by the inflow of a cooling medium into the free space between the heating coil and the jacket of the tubular heating element.
- 10 9. Device according to one or more of Claims 1 to 8, characterized in that the thermopin has, at the upper end remote from the die lip, an external thread via which it is connected to a horizontal retention strip (18), the retention strip having a corresponding bore with internal thread.
- 15 10. Slot die, characterized in that at least one thermopin according to one of Claims 1 to 9 is fixed to the die lip (10) without any play.
- Slot die according to Claim 10, characterized in that the lip nose (11) has slots, and the intervals between these slots correspond to the intervals of the thermopins.
 - 12. Method for adjusting the gap of a slot die, characterized in that the change in the height of the die gap is carried out using thermopins according to one of Claims 1 to 9.
 - 13. Device for adjusting the gap of a die arrangement by means of mechanically acting elements arranged over the width of the dies, characterized in that the intervals between the elements are not all identical, i.e. the elements are arranged at different intervals.
 - 14. Device according to Claim 13, characterized in that the intervals between the elements in the edge region of the die are closer than the intervals between the elements in the central region of the die.


15. Device according to Claim 13, characterized in that the intervals between the elements in the central region of the die are closer than the intervals between the elements in the edge region of the die.

5 ******

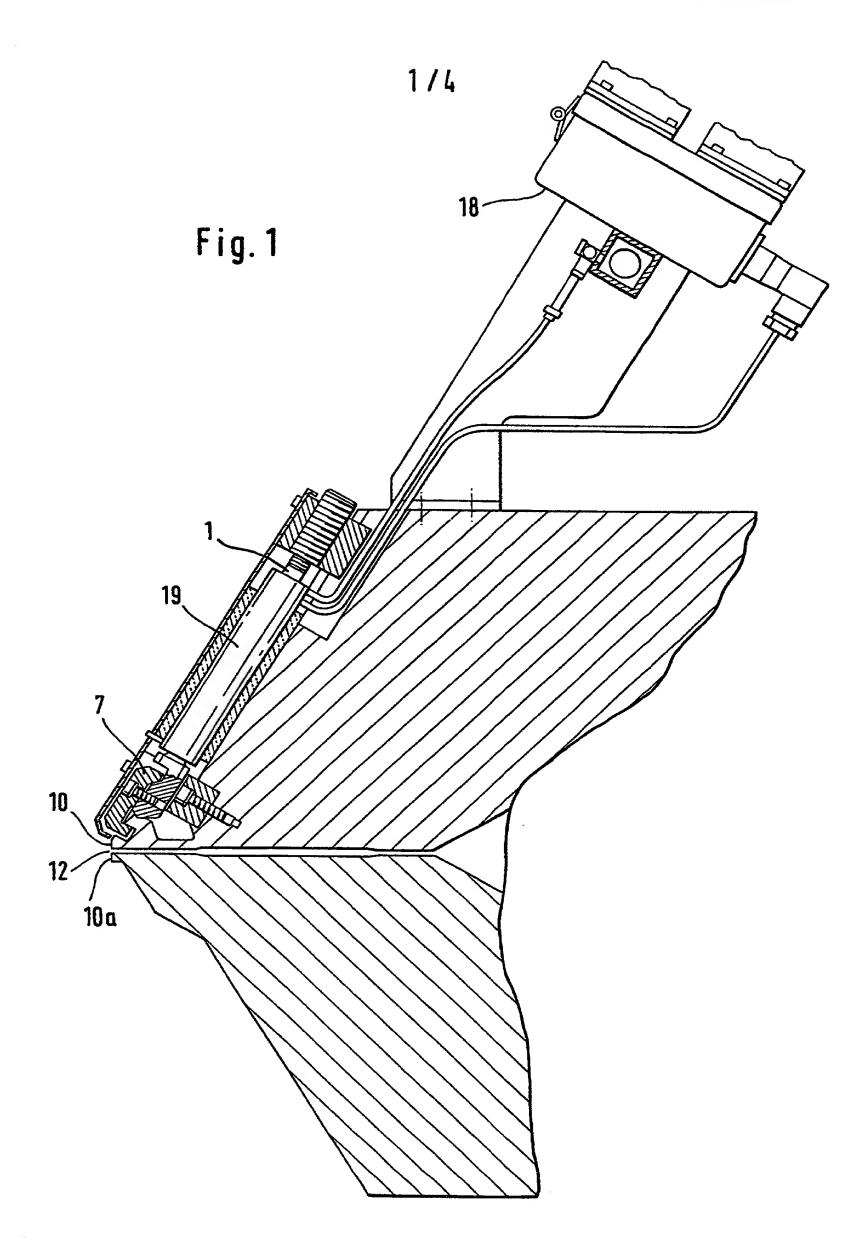

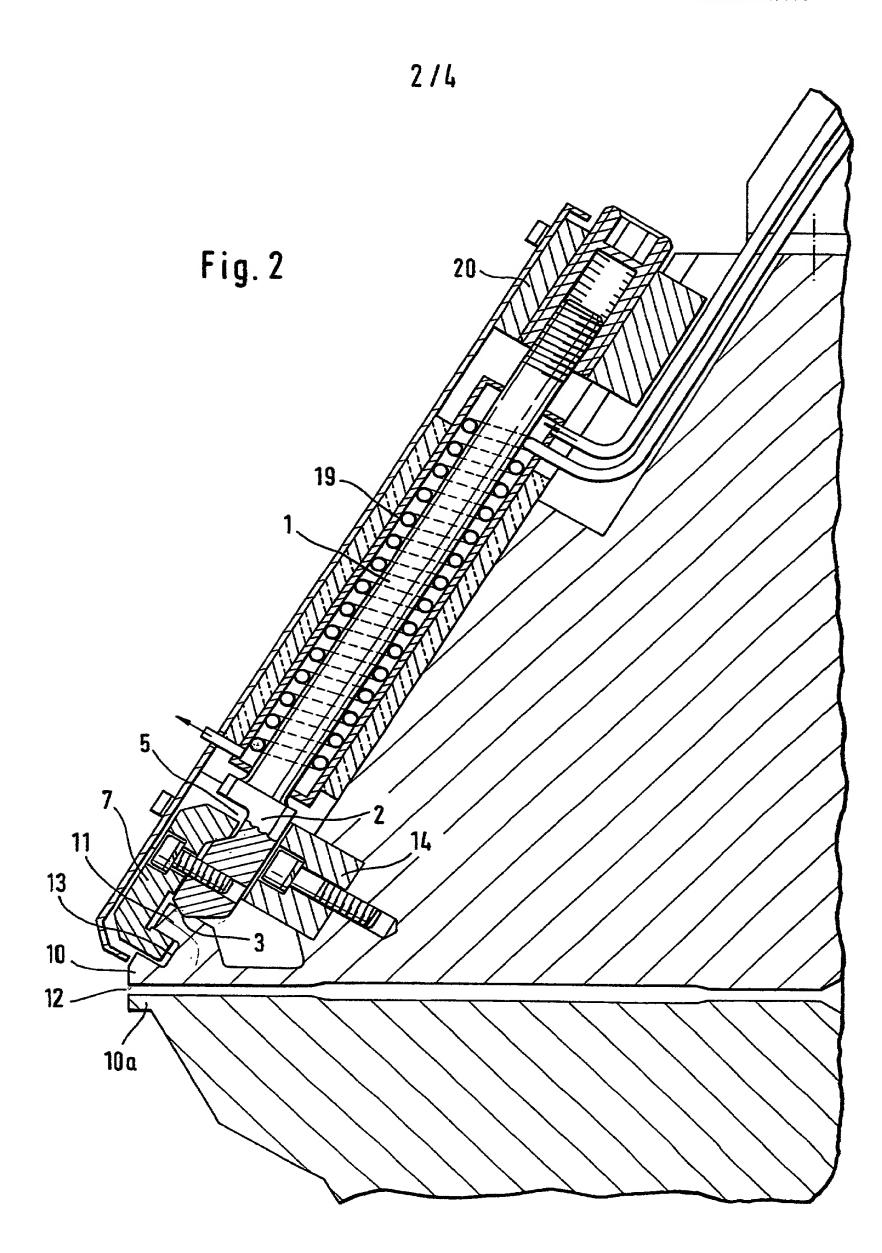

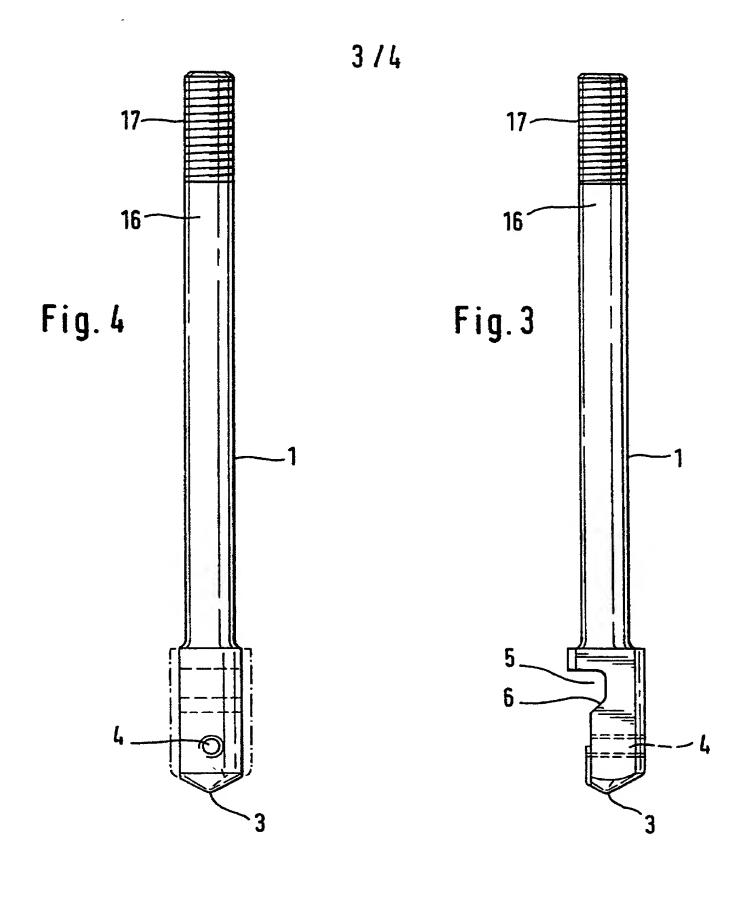








Fig. 5



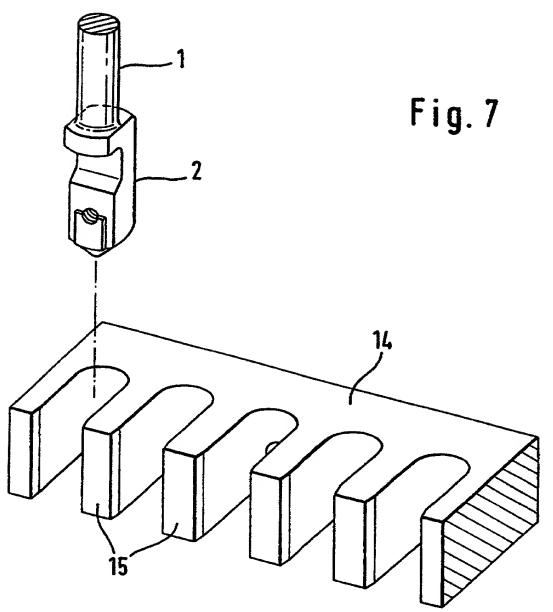

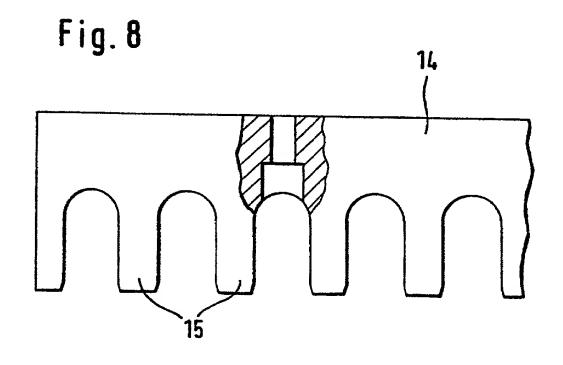

DECLARATION AND POWER OF ATTORNEY

As a below named inventor. I hereby declare that: JUL 1 0 2001 My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled The specification of which (check one) is attached hereto. 1 was filed on _ as Application Serial No. and was amended on ____ (if applicable). I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty of disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, section 1.56. I hereby claim foreign priority benefits under Title 35, United States Code, section 119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed: PRIOR FOREIGN APPLICATION(S) **Priority Claim** 198 55 751.5 DE 03. December 1998 (Number) (Country) (Day/Month/Year filed) No PCT/EP 99/09310 WO 30. November 1999 (Number) (Country) (Day/Month/Year filed) No (Number) (Country) (Day/Month/Year filed) (Number) (Country) (Day/Month/Year filed) Yes No I hereby claim the benefit under Title 35, United States Code, §119(c) of any United States Provisional application(s) listed below: PRIOR PROVISIONAL APPLICATIONS (application serial number) (Month / Day / Year filed) (application serial number) (Month / Day / Year filed) I hereby claim the benefit under Title 35, United States Code, section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United Sates application in the manner provided by the first paragraph of Title 35, United States Code, section 112. I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application: Status - patented, Application Serial No. Filing Date pending, abandoned

DECLARATION AND POWER OF ATTORNEY

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint Jeffrey Kushan, Reg. No. 43,401, Thomas T. Moga, Reg. No. 34,881, Richard Wilder,

Reg. No. 31,202, David Fitzgerald, Reg. No. 47,347 and Dennis Cawley, Reg. No. 44,598, David W.
Woodward, Reg. No. 35,020, and each principal, attorney of counsel, associate and employee of
Powell. Goldstein, Frazer & Murphy, LLP, who is a registered Patent Attorney, my attorney with full
power of substitution and revocation, to prosecute this application and to transact all business in the
Patent and Trademark Office connected therewith. I request the Patent and Trademark Office to direct
all correspondence and telephone calls relative to this application to Powell, Goldstein, Frazer &
Murphy, LLP, P.O. Box 97223. Washington D.C. 20090-7223, (202) 347-0066.
Full name of sole or first inventor: Albrecht FREYNHOFER
Inventor's signature:
Date: _06.06.01
Residence: HAUPTSTRASSE 76, D-66568 SCHIFFWEILER, GERMANY
Citizenship: German
Post Office Address: same as residence
2-0
Full name of second joint inventor, if any: Helmut KREMP
Inventor's signature:
Date: 6.6.2001
Residence: BRUCKENFELD 46, D-66557 ILLINGEN, GERMANY
Citizenship: German
Post Office Address: Same as residence
2-0
Full name of third joint inventor, if any Dieter MATHIEU
Inventor's signature:
Date: 08.06.2001
Residence: FELDSTRASSE 41, D-66546 OTTWEILER, GERMANY
Citizenship: German
Post Office Address: Same as residence
4-10
Full name of fourth joint inventor, if any: Wolfgand RASP
Inventor's signature:
Date:
Residence: UNTERER BRUNNENWEG 11A, D-66424 HOMBURG, GERMANY
Citizenship: German
Post Office Address: Same as residence

Attorney Docket No.

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

dermed m title 3	orior application	Filing Date	Status – j	patented, abandoned
application(s) list not disclosed in 1	ed below and, the prior Unite States Code, se 37, Code of Fe	insofar as the steed Sates applica action 112. I acted action 12 in acted action 12 in action 12	nited States Code, section 120 of abject matter of each of the claims ation in the manner provided by the knowledge the duty to disclose materials, section 1.56 which became a nal or PCT international filing date	of this application the first paragraph aterial information
(application serial r	number)		(Month / Day / Year filed	i)
(application serial r	<u> </u>		(Month / Day / Year filed	<u>i)</u>
I hereby claim th application(s) list	ea below:		ed States Code, §119(e) of any Uni	ted States Provision
(Number)	(Count	y)	(Day/Month/Year filed)	Yes No
(Number)	(Count	ry)	(Day/Month/Year filed)	Yes No
WO 00/32375	PCT	• /	08 June 2000	105 NO
198 55 751.5 (Number)	Germany (Count	rv)	03 December 1998 (Day/Month/Year filed)	XYes No
	Pl	RIOR FOREI	GN APPLICATION(S)	Priority Cla
toreign applican	on(s) for pate lication for p	nt or inventor's atent or invento	Title 35, United States Code, sec certificate listed below and have or's certificate having a filing da	also identified hal
I acknowledge the in accordance with	he duty of disc ith Title 37, Co	lose information ode of Federal R	n which is material to the examina egulations, section 1.56.	tion of this applicat
I hereby state the including the cla	nat I have revi nims, as amend	ewed and under led by any amen	estand the contents of the above in diment referred to above.	lentified specification
	-	Citat 110.		amended on applicable).
	S	as med on erial No	and was	as Application
		s attached hereto		

DECLARATION AND POWER OF ATTORNEY

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint David W. Woodward, Reg. No. 35,020, Jeffrey Kushan, Reg. No. 43,401, Thomas T. Moga, Reg. No. 34,881, Richard Wilder, Reg. No. 31,202, David Fitzgerald, Reg. No. 47,347 and Dennis Cawley, Reg. No. 44,598, and each principal, attorney of counsel, associate and employee of Powell. Goldstein. Frazer & Murphy. LLP, who is a registered Patent Attorney, my attorney with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith. I request the Patent and Trademark Office to direct all correspondence and telephone calls relative to this application to Powell. Goldstein, Frazer & Murphy, LLP, P.O. Box 97233. Washington, D.C. 20090-7223, (202) 347-0066.

Full name of sole or first inventor: Albrecht FREYNHOFER

E/E'S